

THERMAL SPRAY FLEXICORD

Technical Bulletin

ROCDUR 44

RocDur series – ref : 98217 2147 000

ROCDUR 44 Flexicord is designed to be sprayed with our MASTER JET® flame spray gun. ROCDUR 44 provides medium wear resistant coatings as well as a good friction properties. Made of fine particles, it provides smoother & denser coatings than the other RocDur in the as-sprayed state. It produces coating quality close to plasma/HVOF coatings, easy to polish after spraying. Ideal for base coat prior to fluoropolymer top coats. Narrow spray pattern.

Applications

Transfer chutes for glass gob, base coating for polymer (PTFE, FEP, PFA...), friction wear metal surface.

Typical composition (%) - T^{TIP}

Ni 7,5Cr 1,6B 3,5Si 2,5Fe 0,25C

Color code


Skin Red

Packaging

Ø Flexicord 4,75 mm +/- 0,1mm

Spool Plastic - SD 300mm

Weight 11,4 Kg +/- 10%

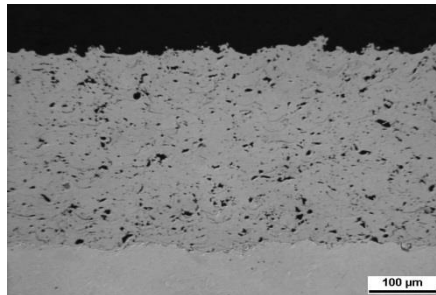


Typical microstructure of RocDur 44 sprayed with our Master Jet® flame spray gun.

Coating features


Porosity	2 – 3,5 %
Pore diameter	5 – 15 µm
Roughness Ra (as sprayed)	6 µm
Typical Hardness	370 Hv ₃₀₀ (38 HRC)
Density	8,1 g/cm ³
Deposit Efficiency	75% to 80%

Gun configuration

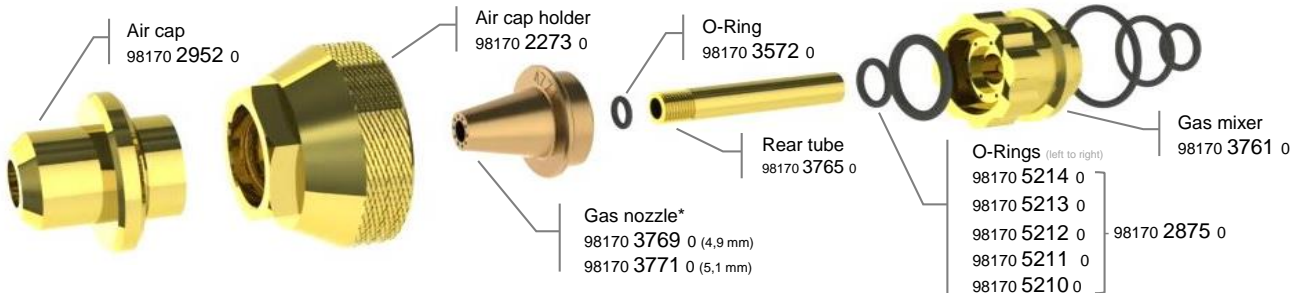


*Use 4,9 mm in dry area – 5,1 mm in wet area

Spray parameters

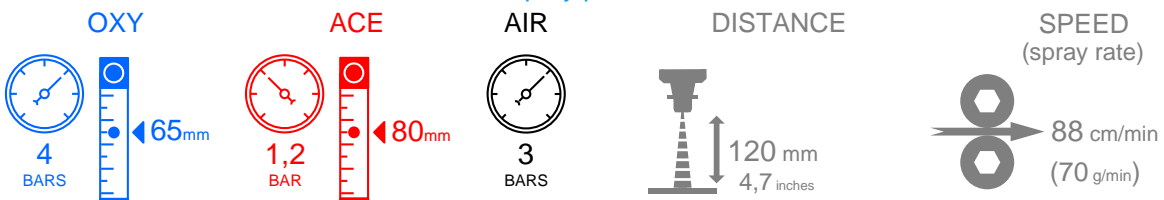

Production performances

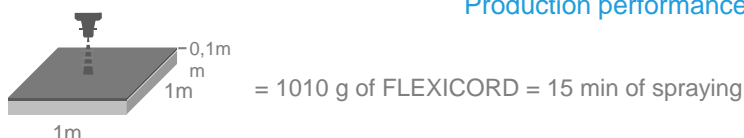

SAINT-GOBAIN COATING SOLUTIONS

coatingsolutions@saint-gobain.com | www.coatingsolutions.saint-gobain.com

The information contained in this document is believed to be accurate and reliable but is presented without guarantee or warranty on the part of Saint-Gobain Ceramics and Plastics Inc. Nothing herein should be interpreted as an authorization or inducement to practice any patented invention without a license.



200817