

# THERMAL SPRAY FLEXICORD

## Technical Bulletin

# AZ SUPRA

Ceramic Supra series – ref : 98210 8147 000

AZ SUPRA Flexicord is designed to be sprayed with our MASTER JET® flame spray gun. AZ SUPRA has a very good abrasion resistance at high associated with good impact resistance. It has a medium hardness, very good toughness, good resistance to thermal shocks and thermal cycles and good corrosion resistance versus most acids & alkalis.

### Applications

Rails, cylinder rods, forming tools in contact with molten glass, refractory funnel. All applications requiring wear resistance and high toughness up to 700°C.

### Typical composition (%) - TTIP


Al <sub>2</sub> O <sub>3</sub>	75
ZrO <sub>2</sub>	23
Other	2

### Color code

Skin	Pink
------	------

### Packaging

Ø Flexicord	4,75 mm +/- 0,1mm
Spool	Plastic - SD 300mm
Weight	4,5 Kg +/- 10%

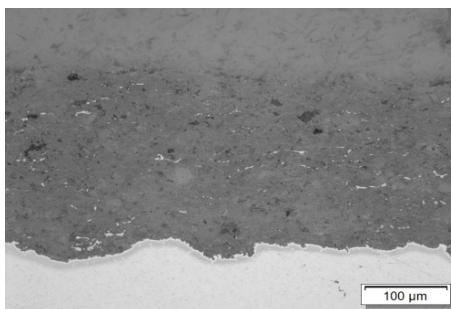


Typical microstructure of AZ Supra sprayed with our Master Jet® flame spray gun.

### Coating features


Porosity	~1,8%
Pore diameter	5 - 10 µm
Roughness Ra (as sprayed)	~5 µm
Hardness	600 Hv <sub>300</sub>
Density	3,52 g/cm <sup>3</sup>
Deposit Efficiency	25%

### Gun configuration

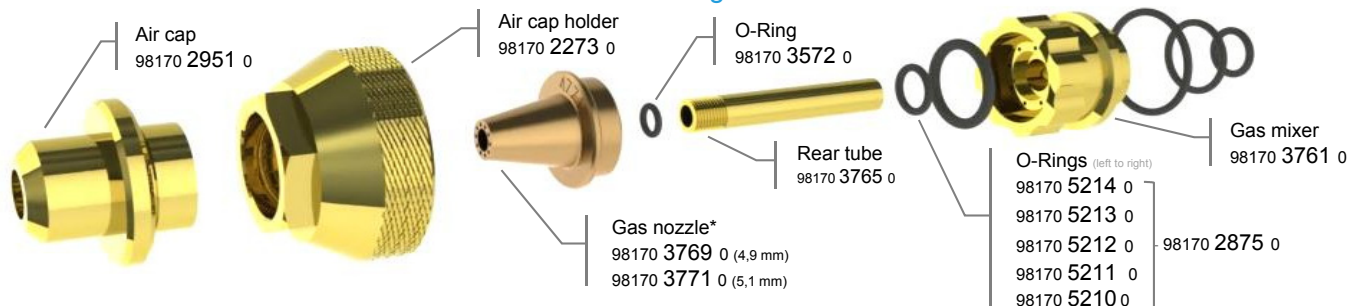

\*Use 4,9 mm in dry area – 5,1 mm in wet area

### Spray parameters

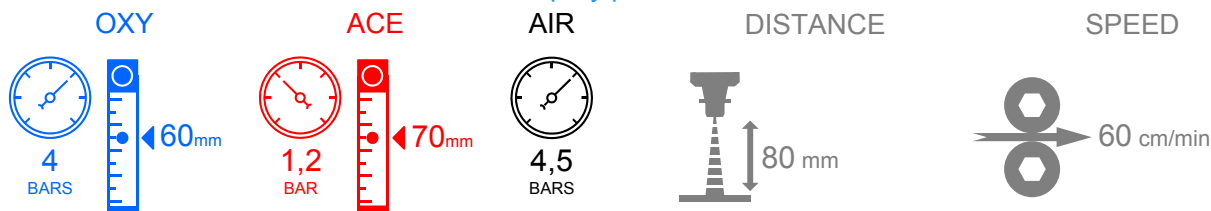

Master Cleaner required (ref.: 98110 3000 000)

### Production performances

